



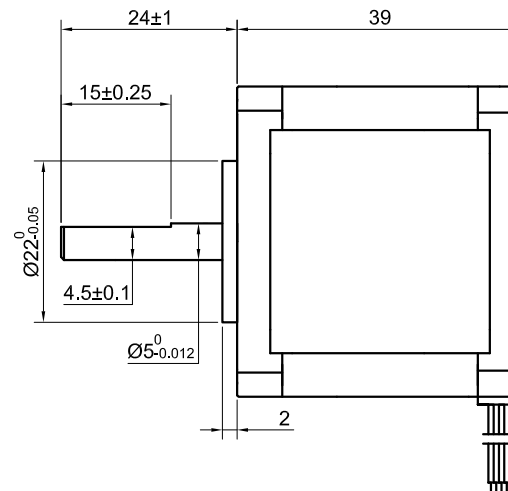

SPECIFICATION	CONNECTION	UNIPOLAR				
VOTAGE(VOC)		12.00				
AMPS/PHASE		0.40				
RESISTANCE/PHASE(Ohms)@25°C		30.00±10%				
INDUCTANCE/PHASE(mH)@1KHz		30.00±20%				
HOLDING TORQUE(Nm)[lb-in]		0.26[2.30]				
STEP ANGLE(°)		0.90				
STEP ACCURACY(NON-ACCUM)		±5.00%				
ROTOR INERTIA(g-cm²)		54.00				
WEIGHT(Kg)[lb]		0.28[0.62]				
TEMPERATURE RISE:MAX.80°C (MOTOR STANDSTILL;FOR 2PHASE ENERGIZED)						
AMBIENT TEMPERATURE -10°C~50°C[14°F~122°F]						
INSULATION RESISTANCE 100 Mohm (UNDER NORMAL TEMPERATURE AND HUMIDITY)						
INSULATION CLASS B 130°C[266°F]						
DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)						
AMBIENT HUMIDITY MAX.85%(NO CONDENSATION)						
		APVD			STEPPER MOTOR	
		CHKD				
1:1		DRN			17HM15-0406S	
SCALE		SIGNATURE		DATE		

STEP	A	B	$\bar{A}$	$\bar{B}$	O($\bar{O}$)	CW
1	+	+			+	
2		+	+		+	
3			+	+	+	
4	+			+	+	
1	+	+			+	

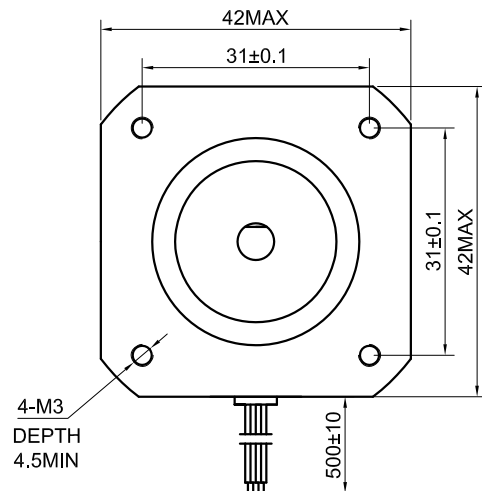