



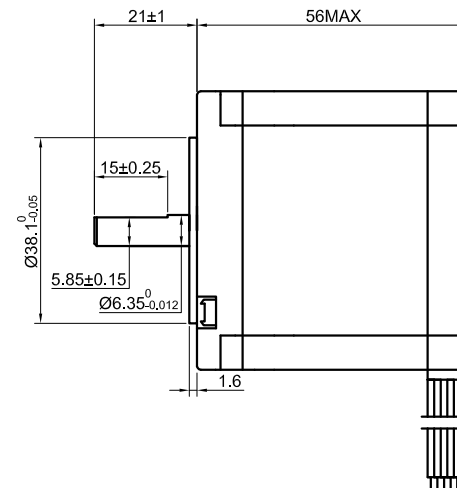

SPECIFICATION \ CONNECTION		UNIPOLAR				
VOTAGE(VOC)		7.40				
AMPS/PHASE		1.00				
RESISTANCE/PHASE(Ohms)@25°C		7.40±10%				
INDUCTANCE/PHASE(mH)@1KHz		10.00±20%				
HOLDING TORQUE(Nm)[lb-in]		0.90[7.97]				
STEP ANGLE(°)		1.80				
STEP ACCURACY(NON-ACCUM)		±5.00%				
ROTOR INERTIA(g·cm²)		300.00				
WEIGHT(Kg)[lb]		0.70[1.54]				
TEMPERATURE RISE:MAX.80°C（MOTOR STANDSTILL;FOR 2PHASE ENERGIZED）						
AMBIENT TEMPERATURE -10°C~50°C[14°F~122°F]						
INSULATION RESISTANCE 100 Mohm（UNDER NORMAL TEMPERATURE AND HUMIDITY）						
INSULATION CLASS B 130°C[266°F]						
DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE）						
AMBIENT HUMIDITY MAX.85%(NO CONDENSATION)						
			APVD			STEPPER MOTOR
			CHKD			
		1:1.5	DRN			
		SCALE	SIGNATURE	DATE	23HS22-1006S	

STEP	A	B	$\overline{A}$	$\overline{B}$	O($\overline{O}$)	CW
1	+	+			+	
2		+	+		+	
3			+	+	+	
4	+			+	+	
1	+	+			+	

UNIPOLAR



BIPOLAR SERIES

