

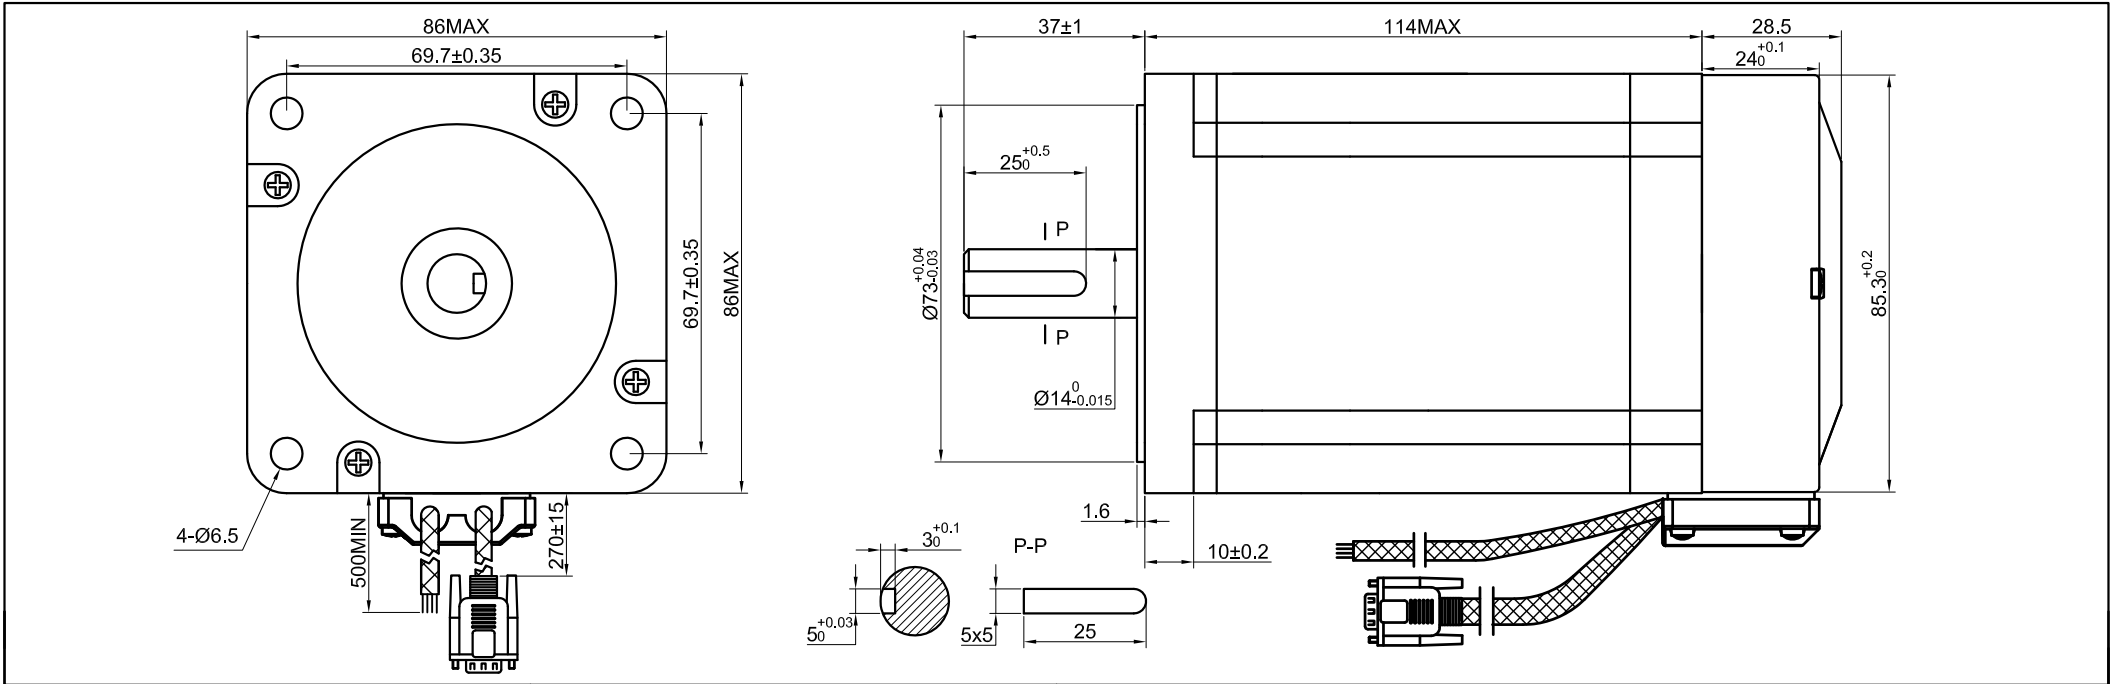




SPECIFICATION		CONNECTION		BIPOLAR				
VOTAGE(VOC)				5.00				
AMPS/PHASE				5.00				
RESISTANCE/PHASE(Ohms)@25°C				1.00±10%				
INDUCTANCE/PHASE(mH)@1KHz				11.00±20%				
HOLDING TORQUE(Nm)[lb-in]				8.50[75.23]				
STEP ANGLE(°)				1.80				
STEP ACCURACY(NON-ACCUM)				±5.00%				
LEAD STYLE				FVR 4X0.75mm² CABLE				
LIFE(h)				6000				
TEMPERATURE RISE:MAX.80°C (MOTOR STANDSTILL;FOR 2PHASE ENERGIZED)								
AMBIENT TEMPERATURE -10°C~50°C[14°F~122°F]								
INSULATION RESISTANCE 100 Mohm (UNDER NORMAL TEMPERATURE AND HUMIDITY)								
INSULATION CLASS B 130°C[266°F]								
DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)								
AMBIENT HUMIDITY MAX.85%(NO CONDENSATION)								
					APVD			STEPPER MOTOR
					CHKD			
			1:1.5		DRN			
			SCALE	SIGNATURE		DATE		
34HS46-5004D-E1000								

TYPE OF CONNECTION (EXTERN)		MOTOR	
PIN NO	BIPOLAR	LEADS	WINDING
1	A —	RED	
2	C —	BLK	
3	B —	YEL	
4	D —	BLU	

DB MALE PLUG



15-PIN DB MALE PLUG	1	2	3	11	12	13
LEAD COLOR	BLK	RED	WHT	YEL	GRN	BLU
DESCRIPTION	EA+	VCC	GND	EB+	EB-	EA-