

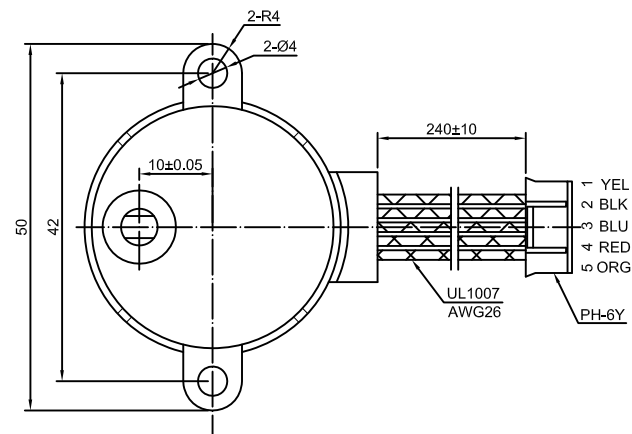
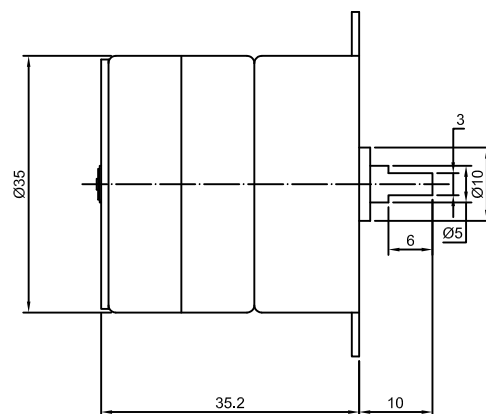




SPECIFICATION	VALUE
NO. OF PHASE	4
AMPS/PHASE	0.4
RESISTANCE/PHASE(Ohms)@25°C	30±7%
INDUCTANCE/PHASE(mH)@1KHz	17.1±20%
HOLDING TORQUE(m.Nm)[lb-in]@25°C DC 12V	1176[10.42]
GEAR RATIO	30
STEP ANGLE(°)@NO LOAD 25°C DC12V	7.5±7%
MAX. PULL-IN RATE(PPS)@25°C DC 12V	360
PULL-IN TORQUE(m.Nm)@300PPS 25°C DC 12V	245
WEIGHT(g)[lb]	115.8[0.26]
INSULATION RESISTANCE(MΩ) @DC 500V	100
TEMPERATURE RISE:MAX.65°C AMBIENT TEMPERATYRE 40°C	
AMBIENT TEMPERATURE -10°C~40°C[14°F~104°F]	
INSULATION CLASS E 120°C[248°F]	
DIELECTRIC STRENGTH 650VAC FOR 1SEC.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)	

FULL STEP 4 PHASE-Ex. ,
WHEN FACING MOUNTING END (X)

PIN NO.	WIRE COLOR	STEP			
		1	2	3	4
1	YEL	+	+	+	+
2	BLK	-			-
3	BLU	-	-		
4	RED		-	-	
5	ORG			-	-

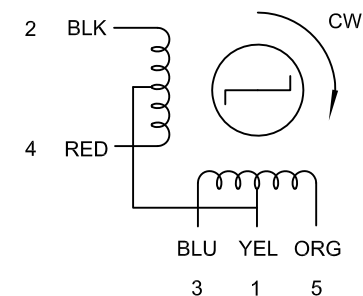

	mm	APVD		5.16.2019	PM STEPPER MOTOR
	UNIT	CHKD			
	2:1	DRN			35PM48M01-SG30
	SCALE	SIGNATURE		DATE	