
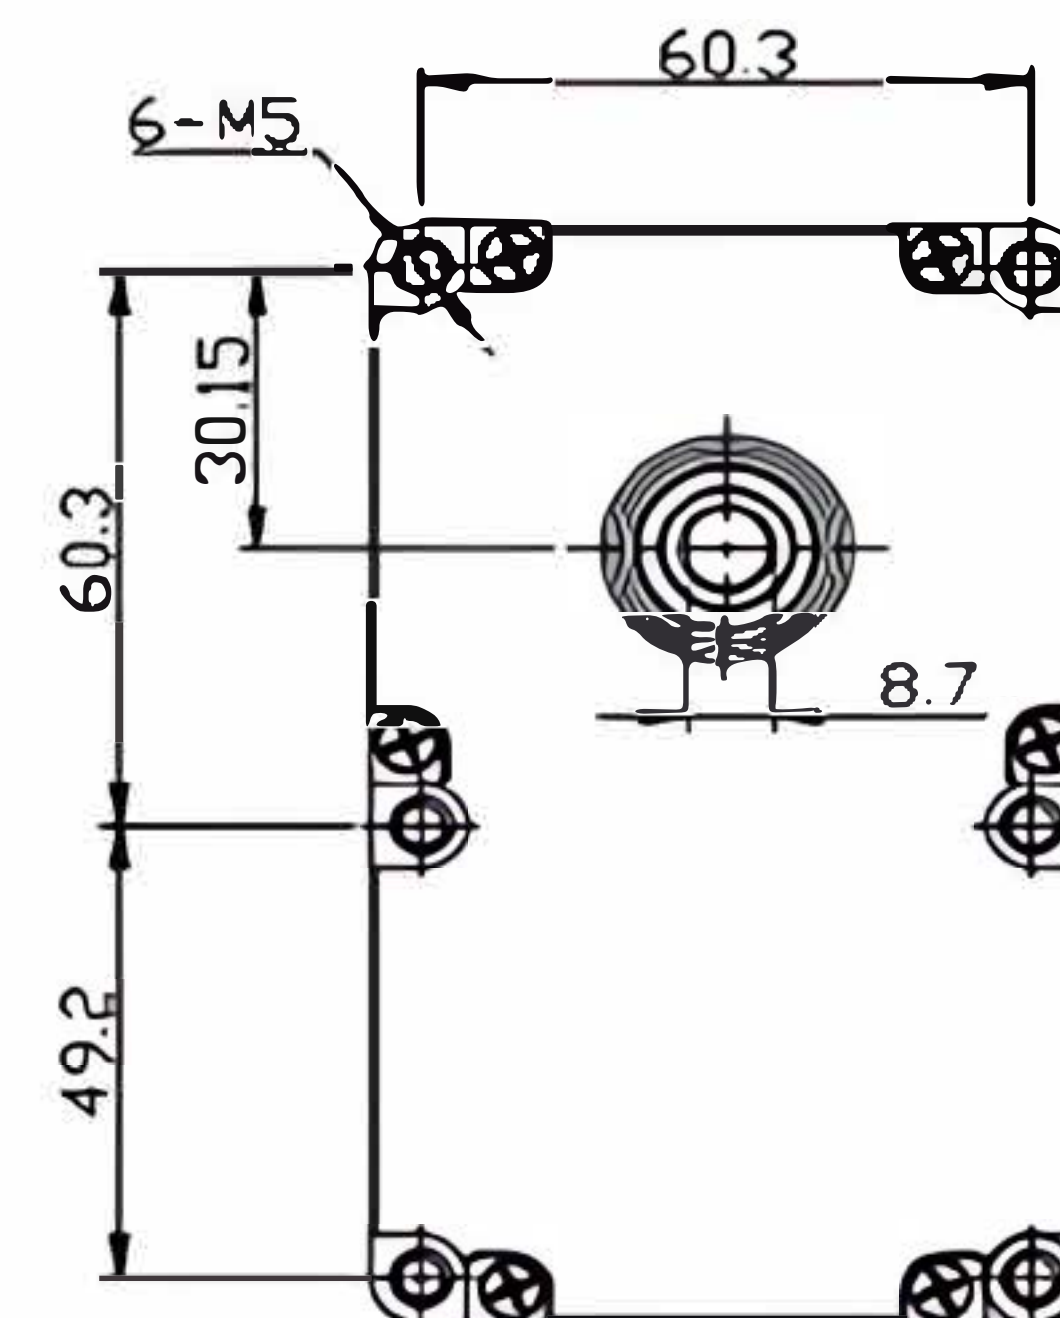


Technical drawing of a mechanical assembly (Fig. 1) showing a front view with dimensions. The drawing includes a central cylindrical component with a flange, mounted on a base. Dimensions are given in millimeters. Key dimensions include: overall width 70, overall height 119, distance from top edge to center of the upper flange 60.3, distance from top edge to center of the lower flange 64, distance from center of the upper flange to center of the lower flange 60.3, distance from center of the lower flange to the bottom edge 61, and distance from the left edge to the center of the lower flange 30.15. A note "6 - Ø5.2" points to a hole in the top plate. A tolerance "500±20" is indicated for the central component.

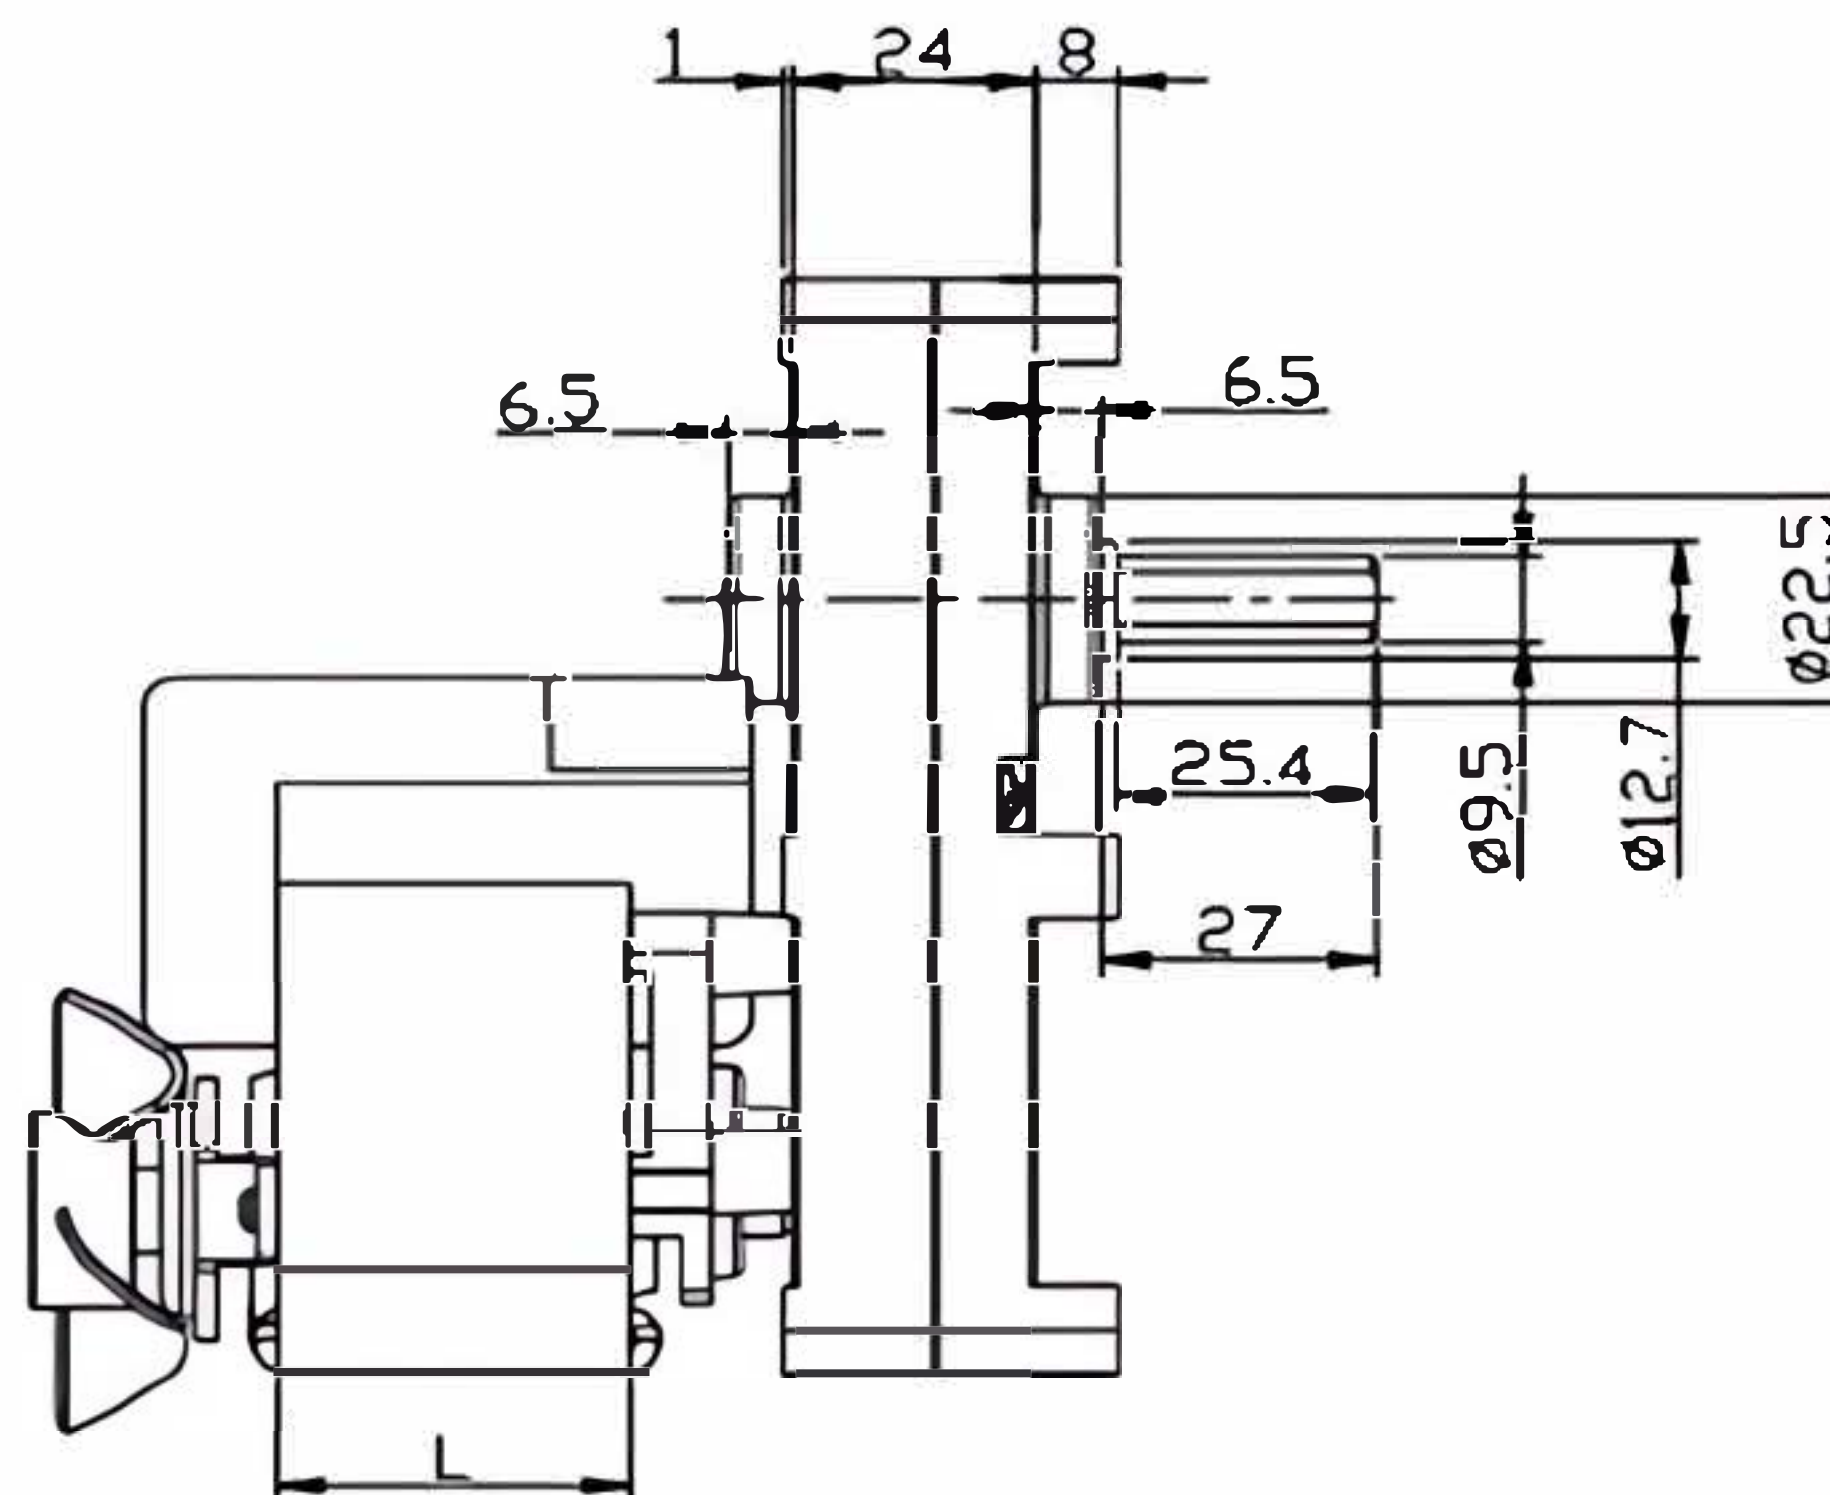

Reduction ratio	$\frac{1}{251}$	$\frac{1}{389}$	$\frac{1}{590}$	$\frac{1}{722}$	$\frac{1}{897}$	$\frac{1}{1269}$	$\frac{1}{1601}$	$\frac{1}{1929}$	$\frac{1}{2708}$	$\frac{1}{3385}$	$\frac{1}{5078}$
Numberofgeartrans	4					5				6	
Ratedspeed (rpm) at60Hz	11.1	7.1	4.7	3.8	3.1	2.2	1.7	1.4	1.0	0.8	0.5
GF-YJ61-16 L=16 (kgf.cm) Rated torque	22.8	35.4	53.7	65.7	81.6	104	132	159	200	200	200
GF-YJ61-26 L=26 (kgf.cm) Rated torque	35.9	55.6	84.4	103	128	164	200	200	200	200	200
GF-YJ61-30 L=30 (kgf.cm) Rated torque	45.7	70.8	107	131	163	200	200	200	200	200	200
GF-YJ61-35 L=35 (kgf.cm) Rated torque	57.1	88.5	134	164	200	200	200	200	200	200	200
GF-YJ61-40 L=40 (kgf.cm) Rated torque	65.5	101	153	187	200	200	200	200	200	200	200
GF-YJ61-50 L=50 (kgf.cm) Rated torque	84.8	131	199	200	200	200	200	200	200	200	200
Note :	Voltage can make as customers' request										
Packing Details	CTN size : 31X30XH10cm 4pcs/CTN N.W.7kgs										